

Distributed Temperature Sensor DTSX3000 / DTSX200



Distributed Temperature Sensing Enhances Site Safety, Asset Monitoring and Facilities Maintenance Function



Intrinsically safe systems for leak detection, industrial process, and asset monitoring.

Ruggedized fiber optic sensor cable is deployed on the monitored area for continuous temperature monitoring along the entire cable length - no discrete sensors are required.

Areas of temperature change indicating leakage or other process abnormalities can be detected for corrective action.

Principal monitoring applications:

- Heat build-up along industrial conveyor systems
- Cable tunnels, ducts, trays or rack systems where heat build-up could become a fire hazard
- Power cable operating temperatures for real-time thermal capacity rating and smart grid optimization
- Furnace chamber deterioration diagnosis via external wall surface temperature profiling

DTSX Fiber Optic Distributed Temperature Sensing System

Features:

- Easy process control system integration
- Wide operating environment range
- Compact and ultra-low power consumption
 - Measure up to 50 km
 - Optional 2-, 4-, 16-channel modular optical switch
- Ethernet and Serial Modbus Communications
- LAS 2.0 and WITSML 1.3.1.1 data formatting option
- STARDOM Field Controller (NFCP050) option
- Field enclosure with solar panels, batteries, and wireless communications available


= LAS is Log ASCII Standard

= WITSML is Well-site Information Transfer Standard Markup Language

Distributed Temperature Sensor DTSX3000 / DTSX200


Application Examples

Wellbore Dynamics / Geophysical Monitoring

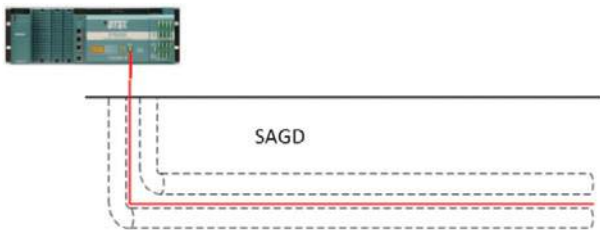


Wellbore temperature distribution profile can be used to detect thermal events related to steam breakthrough and oil & gas intake position, or other geophysical conditions.

Conveyor System Safety Monitoring

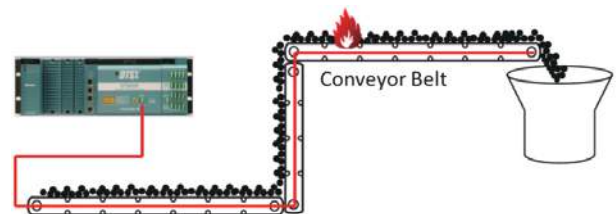


DTSX can be used to detect heat build-up along conveyor systems indicating mechanical component failure or potential combustion conditions.

Cable Rack Monitoring

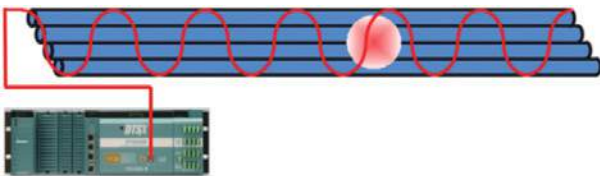


DTSX can be easily deployed along cable tunnels, ducts, trays or rack systems where heat build-up could indicate the potential for a fire hazard, or conductor over-temperature condition.

Pipeline Leak Detection System

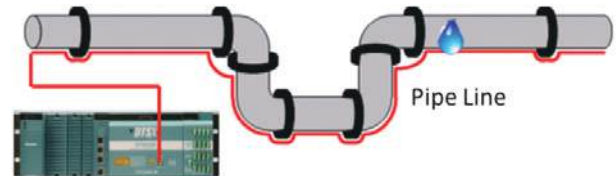


DTSX thermal profiles can be used to detect leak locations along LNG, liquid ammonia and other compressed gas pipelines where escaping content creates a thermal variance from normal background temperatures.

LNG Storage Tank

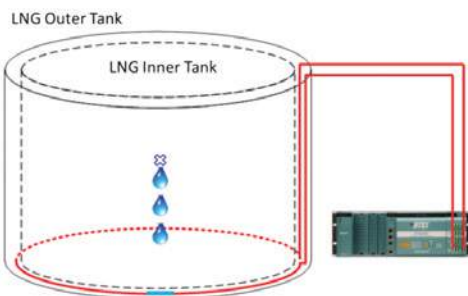

DTSX is commonly used for LNG tank leak detection by monitoring the expected differential in temperatures between the inner and outer liners comprising the tank system.


Furnace Chamber Skin Temperature Monitoring

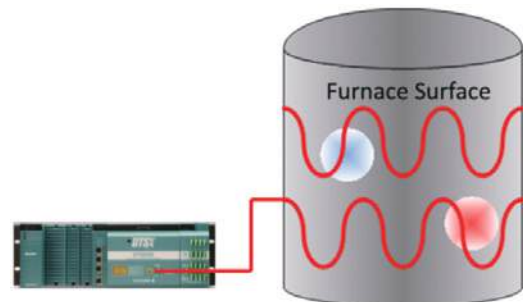

Furnace chamber or reactor vessel liner deterioration diagnosis via external wall surface temperature profiling.

Distributed Temperature Sensor DTSX3000 / DTSX200

System Configuration Example

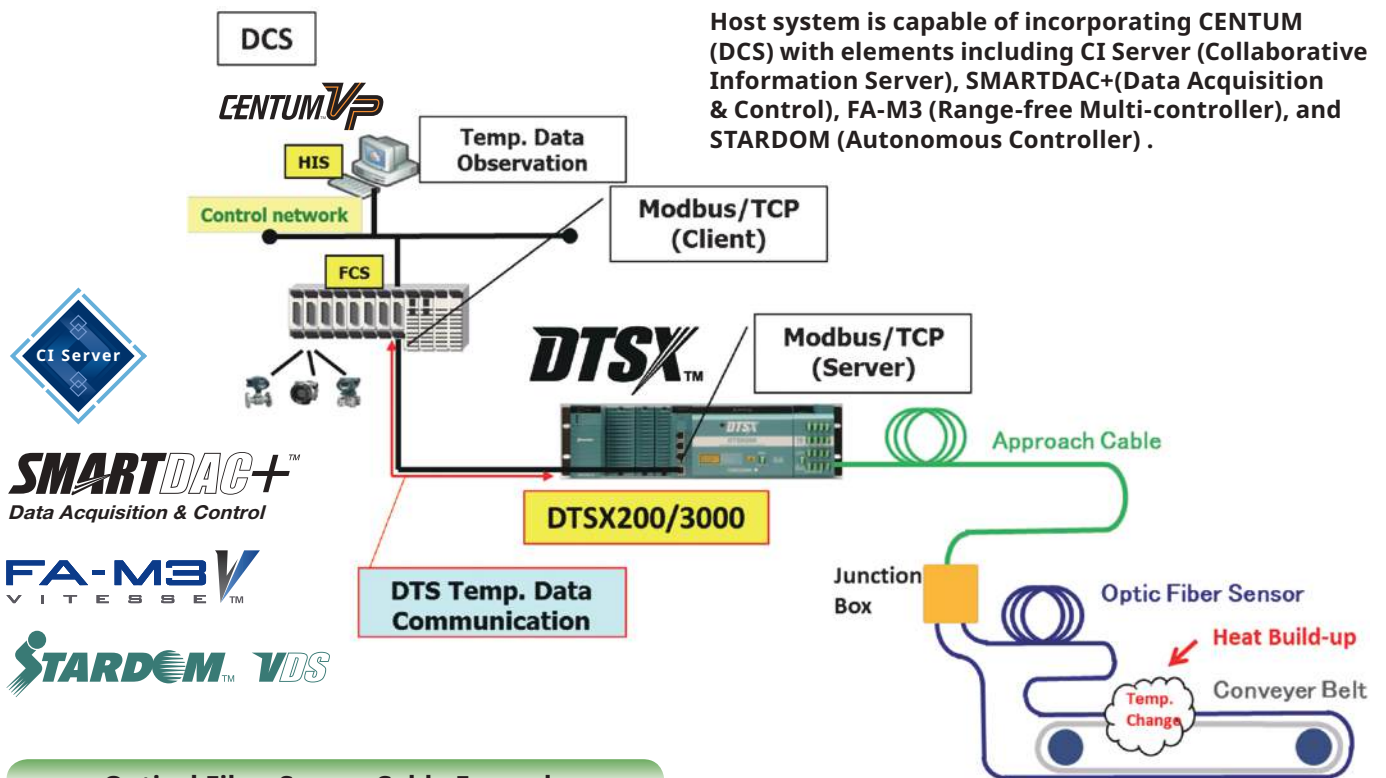

Optical Fiber Sensor Cable Example

	Cable Type	Temperature Range	Applications
1. FIMT (Fiber in Metal Tube) (SUS, Incoloy Alloy)		Low(-200°C~) Normal(-20~+70°C) High(~+300°C)	Furnace chamber LNG Pipeline, Tank Cable Rack System Conveyor System Oil & Gas Wellbore
2. FIMT with PE Sheath		-20~+70°C	Cable Rack System Conveyor System Tunnel Fire Detection
3. Flexible Metallic		-20~+70°C	Cable Rack System Conveyor System Room Temperature
4. Non-metallic (Flame Retardant Polyethylene)		-20~+70°C	Cable Rack System Conveyor System Room Temperature

DTSX3000

Power Module

DTS Module

Optical Switch Module (Option)

Long Range



DC10-30 V
AC100 V-240 V Selectable

2ch/4ch/16ch
Selectable

Variety Distance Range Lineup

- DTSX3000-S ~ 10 km
- DTSX3000-N ~ 16 km
- DTSX3000-M ~ 30 km
- DTSX3000-L ~ 50 km

Specification is available by GS (General Specification)
DTSX3000: GS 39J06B40-01EN, GS 39J02B40-01EN

DTS: Distributed Temperature Sensor

DTSX200

Power Module

DTS Module

Optical Switch Module (Option)

Mid. Range



DC10-30 V
AC100 V-240 V Selectable

2ch/4ch/16ch
Selectable

- DTSX200 ~ 6 km

Specification is available by GS (General Specification)
DTSX200: GS 39J06B45-01EN, GS 39J02B45-01EN

OpreX™ Through the comprehensive OpreX portfolio of products, services, and solutions, Yokogawa enables operational excellence across the enterprise.

Trademarks

All brand or product names of Yokogawa Electric Corporation in this bulletin are trademarks or registered trademarks of Yokogawa Electric Corporation. All other company brand or product names in this bulletin are trademarks or registered trademarks of their respective holders.

Yokogawa Electric Corporation

www.yokogawa.com

YOKOGAWA ELECTRIC CORPORATION
9-32, Nakacho 2-chome, Musashino-shi, Tokyo 180-8750, Japan

YOKOGAWA CORPORATION OF AMERICA
12530 West Airport Blvd, Sugar Land, Texas 77478, USA

YOKOGAWA EUROPE B.V.
Euroweg 2, 3825 HD Amersfoort, The Netherlands

YOKOGAWA CHINA CO., LTD.
Room 1801, Tower B, THE PLACE, No.100 Zunyi Road, Changning District, Shanghai, China

YOKOGAWA MIDDLE EAST & AFRICA B.S.C.(c)
P.O. Box 10070, Manama, Building 577, Road 2516, Busaiteen 225, Muharraq, Kingdom of Bahrain

Please note that the product component description are subjective interpretations and may change without notice.
All Rights Reserved. Copyright © 2014, Yokogawa Electric Corporation

Printed in Japan, 211(KP) [Ed:05/b]